



eCO2

High Speed Fractional CO₂ Laser

UNCOVERING YOUTH
ONE PATIENT AT A TIME

LUTRONIC®


Transform Your Practice with the Robust eCO2

Lutronic's eCO2 is the premier fractional ablative laser that delivers the full spectrum of resurfacing treatments to your busy practice. You will appreciate how easy to use and reliable the system is while your patients rave about their outcomes.

MINIMAL DOWNTIME, IMPROVED PATIENT COMFORT

The eCO2 features the patented Controlled Chaos Technology (CCT™), an algorithm to pseudo-randomly deliver each micro laser beam and by placing maximum distance between sequential beams the system eliminates cross thermal diffusion between adjacent Micro-ablative Columns (MACs).

This allows the tissue to maximize heat dissipation between shots. The result is an increased safety profile with a reduction in post-operative discomfort and faster healing time leading to unparalleled fractional resurfacing results.

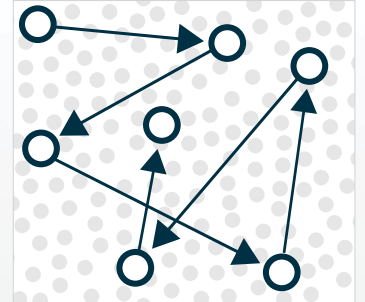

PROVIDE THE RESULTS YOUR PATIENTS DEMAND



ACNE SCARS - COURTESY OF JEFFERY A. RAPAPORT, MD



WRINKLES & TEXTURAL IRREGULARITIES - COURTESY OF J. DAVID HOLCOMB, MD




PIGMENTED LESIONS - COURTESY OF MARK RUBIN, MD

APPLICATIONS

- Skin Resurfacing
- Wrinkles, Rhytids & Fine Lines
- Scars (e.g.: Acne, Surgical, other)
- Textural Irregularities
- Dyschromia
- Pigmented Lesions & Lentigines
- Solar/Actinic Elastosis
- Nevus
- Incision & Excision Capabilities

ULTIMATE CONTROL OVER ENERGY DELIVERY

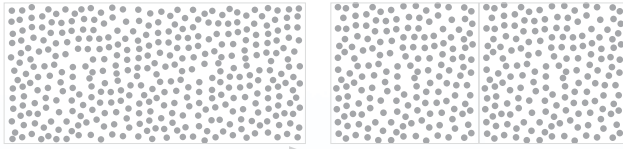


DYNAMIC MODE

STATIC MODE

Dynamic Mode completely eliminates the checkerboard look of other CO₂ systems and provides clinicians with a more comfortable operation by allowing the user to 'air brush' the energy. Whether you're treating large areas or just feathering to eliminate demarcation lines, **Dynamic mode** provides your patients with a more natural look.

Static Mode delivers precise coverage utilizing traditional 'Stamping' allowing users to treat scanned areas up to 18 x 18 mm with selectable density options to enable precise delivery of laser energy without the need for multiple passes other systems require.

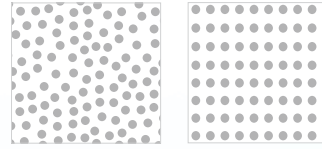

RANDOM

REGULAR

The eCO2 allows you to control how you want to lay the energy down, choose from a pre-programmed regular pattern or random pattern. In either mode the laser energy will be distributed using Controlled Chaos Technology.




QUICK-CHANGE TIPS WITH AUTO-RECOGNITION

From ultra-deep to superficial ablation, the eCO2 has the features you need to address a broad range of clinical conditions. The ultra-fast quick change tips come in a choice of three spot sizes, 120 and 300 µm, allowing you on-the-fly customized treatments. The eCO2's tip auto-recognition feature automatically changes treatment settings to adjust for the change in spot size. Combined together, the advanced technology, quick-change tips and safety features ensure the ultimate control for the best outcomes.


120 µm Tip

- Deep Dermis penetration
- 1-17% coverage per pass
- Rapid Healing Times

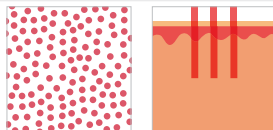

300 µm Tip

- Mid Dermis Penetration
- 5-58% coverage per pass
- Wider, intermediate ablation depth

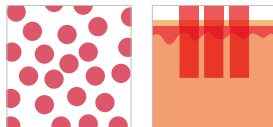


VARIETY OF LARGE SCAN SIZES

Scan sizes from 1x1 mm to 18x18 mm with a variety of shapes to choose from. Combining large scan size with the dynamic air-brush mode ensure fast and natural looking results.



DENSITY CONTROL

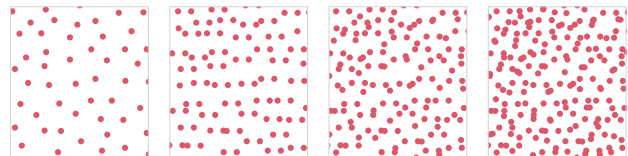

Choose your density and eliminate the need for multiple passes and the clinical disadvantages of unavoidable overlap. The end result is a single pass treatment customized for your patient.

SUPER-PULSE AND CHAR-FREE (ULTRA-PULSE) MODES

With the ability to control your thermal damage, you can further adjust and customize treatments to your patients needs.

"eCO2 is a CO2 laser that can really make a difference in treating scars and for the prevention early scar formation. What really got me excited about the eCO2 is the the 120 micron spot size that allows me treat deep and then combined with dynamic mode I am able to quickly and efficiently treat large areas, which can take hours with other devices; in head to head comparisons with other devices the eCO2 is always faster."




Jill Waibel, M.D., Miami, FL

LUTRONIC®

WHY eCO2?

- Low risk, high safety, rapid recovery and low downtime are attractive to patients
- Controlled Chaos Technology creates pseudo-random microwound patterns to minimize heat build-up and maximize patient comfort
- Capable of delivering fractional, full field ablative, incisional and excisional laser treatments*
- Proven reliability
- Easily adjust treatment parameters through intuitive and user-friendly interface
- Two energy delivery modes (dynamic and static) further increase versatility and control over outcomes
- No consumables reduces operating cost and improves ROI

SYSTEM SPECIFICATIONS

PERFORMANCE		SYSTEM SPECIFICATION	
Laser Wavelength		10.6 μm	
Medium and Method of Generation		Sealed Off CO ₂ RF Module Laser**	
Beam Delivery Method		Articulated Arm with Scanner or Conventional Handpiece	
CO ₂ RF Module Maximum Power		Maximum 30 watts at Continuous Wave	
 Fractional Scanner Handpiece	User Mode	Static (Stamping) / Dynamic (Air Brushing)	
	Tip	120 & 300 μm spot sizes	
	Pulse Energy	2 mJ - 240 mJ	
	Pulse Rate	10 Hz - 200 Hz	
	Density	25 - 400 spots/cm ²	
	Scan Area	18 x 18 mm	
	Scan Shapes	 ("Point Beam")	
	Scan Size	Square, Circle, and Triangle: 1x1, 2x2, 4x4, 8x8, 12x12, 16x16, 18x18 mm Rectangle: 18X5, 18X9, 18X12 mm	
 Surgical Handpiece*	User Mode	Char Free (Ultra Pulse) / Super Pulse / Continuous Wave	
	Pulse Rate	Char Free (Ultra Pulse)	1 Hz - 700 Hz
		Super Pulse	1 Hz - 550 Hz
	Pulse Width	Char Free (Ultra Pulse)	40 μs - 1000 μs
		Super Pulse	1 ms - 5 ms
	CW	ON Time	CONT. 0.01 s - 1.0 s
		OFF Time	SINGLE 0.001 s - 1.0 s
	Adjustable Spot size	0.2-1.0 mm	
Dimensions (mm)		360 (W) x 450 (W) x 1870 (H)	
Weight (excluding the arm)		48 kg	

LUTRONIC, Inc.
 US Headquarters
 850 Auburn Court
 Fremont, CA 94538

lutronic.com | 888-588-7644

©2015, LUTRONIC Group of Companies. All rights reserved. LUTRONIC, its logo and eCO2 are trademarks or registered trademarks of the LUTRONIC Group of Companies. This product or the use of this product is covered by one or more US and foreign patents or patent application pending. eCO2-BR-4100151500-US rev02

*Optional **Coherent Laser brand Sealed Off CO2 RF Module Laser.

LUTRONIC®